


MHD

横型制版用干燥机

Stencil making series

丝网印刷制版机械

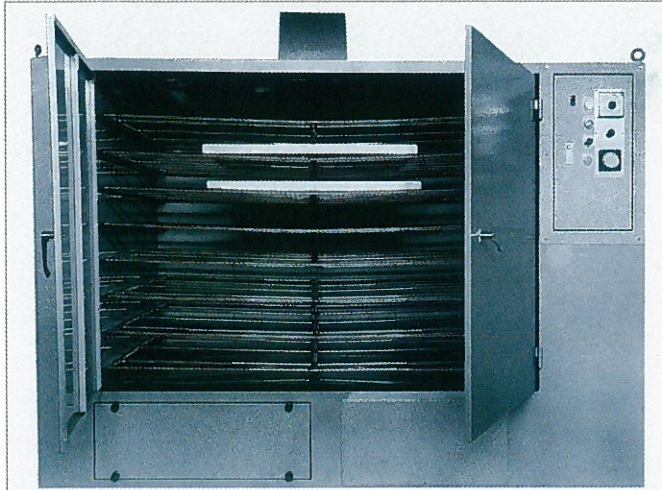

规格, 技术参数 Specification/Technical Data

型号 Model	MHD-100120	MHD-125160	MHD-150250
最大网框尺寸 Max Frame Size	1000x1200mm	1250x1600mm	1500x2000mm
最小框尺寸 Min Frame Size	400x400mm	400x400mm	400x400mm
加热器 Heater	3.6kw	3.6kw	3.6kw
鼓风机 Air Blower	11/20.4kw	13/40.75kw	21.5kw
一次过滤 Dust Filter	300x300 1张 300x300 1pc	300x300 1张 300x400 1pc	300x300 1张 300x300 1pc
二次过滤 Dust Filter	500x500 1张 300x300 1pc	400x400 2张 400x400 2pc	500x500 2张 500x500 2pc
框栅数 No. of Franme	8层 8 pcs	8层 8 pcs	8层 8 pcs
电源 Electrical Supply	AC200V 3PH 4kw	AC200V 3PH 4.35kw	AC200V 3PH 8.1kw
安装尺寸 Dimension	2055x1100x1875	2605x1360x1995	3505x1610x1995
重量 Weight	420kg	470kg	550kg

MINO HORIZONTAL DRYER是解决众多干燥中发生的问题而设计制造的横行网框干燥机。

MHD frame dryer is the machine design for solve a lot of difference problems out from drying. Its features includes.

特征: Feature

- 防止感光胶干燥的时候以液体垂掉引起的感光胶层的不平, 丝网的开口部分的堵塞有好处。
- 根据网框的大小可以把版的印刷面往下, 水平的状态中进行干燥。
- 内部设定温度时, SSR调整热风机发挥出很快, 很安定, 省电的优越性能。
- 强力鼓风机将迅速进行干燥, 而且炉内的温度分布状态也是很突出的。
- 干燥时, 为防止灰尘在风口安装了过滤器。
- During drying process, horizontal drying method will prevent the chemical coating flowing down and cause the coating uneven. It is also good match with Filler.
- Printing side of the frame could be positioned facing down the heat and dry horizontally.
- Cabinet temperature is monitored by SSR heat circulator. It operates safely and energy saving.
- Strong air blower will help to speed up the drying time. The temperature is evenly spreading over inside of the cabinet.
- During drying process, dust filters are installed to prevent dust flowing into the cabinet.



ミノ・インターナショナル株式会社

MINO INTERNATIONAL LTD.

ISO9001承認

4-47-54, NUKUI, NERIMA-KU, TOKYO 176-0021 JAPAN
TEL: 81-3-3577-1621 FAX: 81-3-3577-3326

China Contact: 中国联络处

Shanghai TEL: 86-21-68931791
上海 FAX: 86-21-58731670

Shenzhen TEL: 86-769-87772010
深圳 FAX: 86-769-87772715

Gao Yao TEL: 86-758-8512888
高要 FAX: 86-758-8513098

Tianjin TEL: 86-22-85685121
天津 FAX: 86-22-85685120